





300 S. DAYTON ST.
 DAVISON, MI 48423
 PH: 810-653-9626
 FAX: 810-654-2616

Part Number:

1071 Series Couplings

Description:

Corrugated Plastic
 to
 Corrugated Plastic

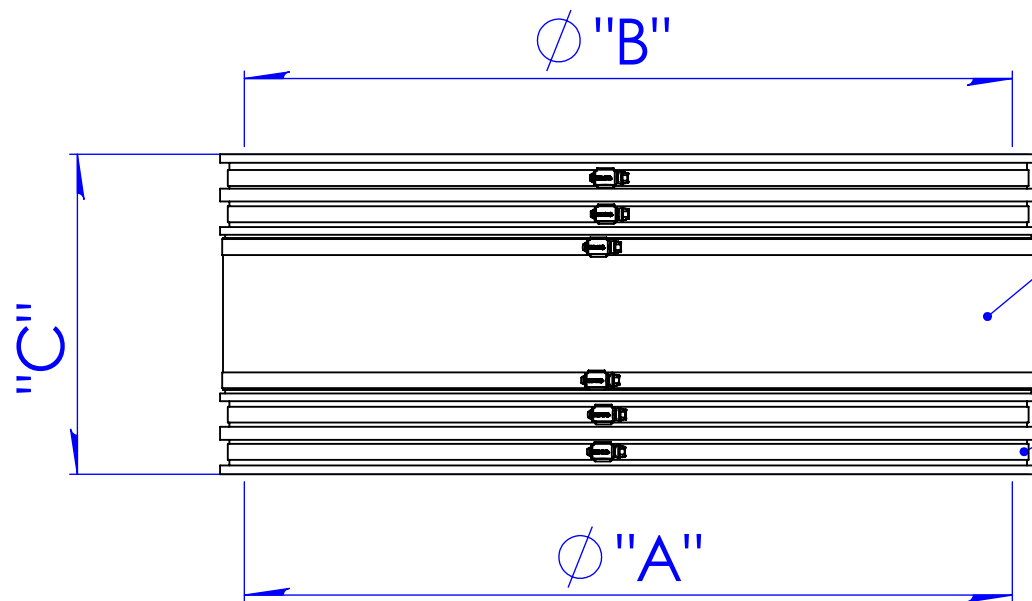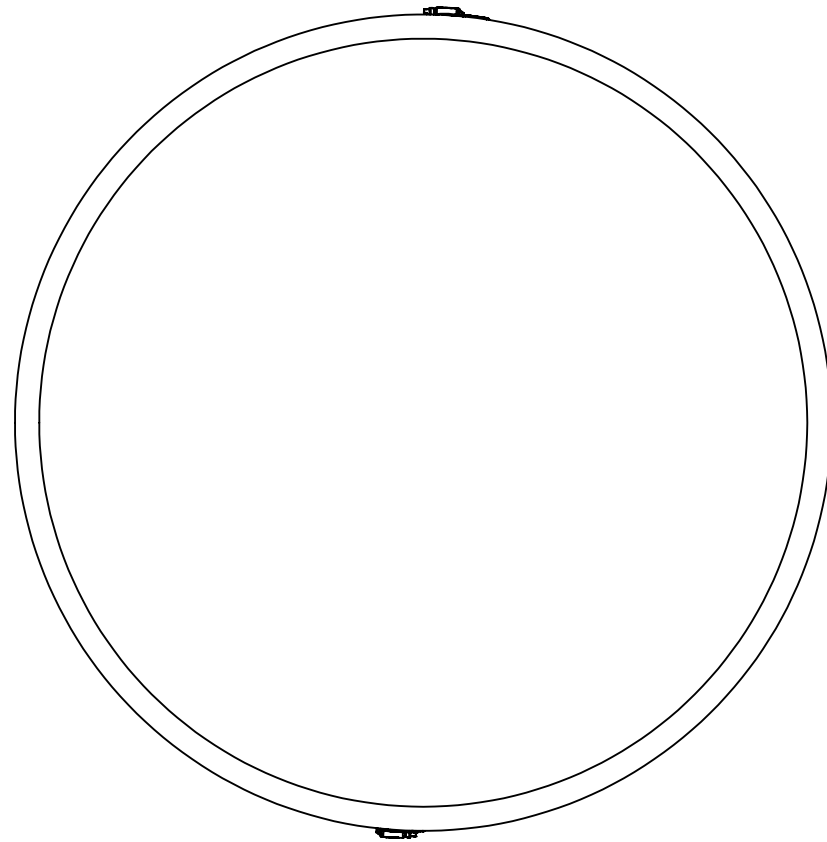

300SS Shield with High Torque Clamps Two Locations

High Torque Clamps
 4 Locations
 * Equipped with 2 HT Clamps

Designed for Gravity Flow Sewer and Storm Water Systems

Part Number	"A"	"B"	"C"
* 1071-1010HTRC	11.6	11.6	6.0
1071-1212HTRC	14.4	14.4	10.0
1071-1515HTRC	17.7	17.7	10.0
1071-1818HTRC	21.3	21.3	10.0
1071-2424HTRC	28.1	28.1	10.0
1071-3030HTRC	35.4	35.4	10.0
1071-3636HTRC	41.6	41.6	10.0
1071-4242HTRC	47.7	47.7	10.0
1071-4848HTRC	54.1	54.1	10.0
1071-5454HTRC	61.0	61.0	10.0
1071-6060HTRC	66.8	66.8	10.0

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 FERNCO, INC. ANY REPRODUCTION IN
 PART OR AS A WHOLE WITHOUT THE
 WRITTEN PERMISSION OF FERNCO, INC.
 IS PROHIBITED.

TOLERANCES:
 Fractional $\pm 1/4"$
 .XX = $\pm .06$
 ANG. = $\pm 3^\circ$
 UNLESS OTHERWISE SPECIFIED

Gasket Material: Black Plasticized PVC

Clamps: 300 SS HT

Installation Torque: 120 in-lb, Shield 60 in-1b

Standards: ASTM D5926

Shield: 300SS .012" x 4.88"

Min/Max Temp: -30/140 Degrees F

UNITS:

INCHES

SIZE:

A

DESIGNER:

T. Dipzinski

SCALE:

not to scale

3RD ANGLE PROJECTION

DO NOT SCALE DRAWING

CHECKER:

DATE:

19 Jul 13

SHEET 1 OF 1